

110068K SAFETY WITH THREADED STAINLESS STEEL INSERT



INOX
Stainless
Steel

Black reinforced polyamide with caps in colours: black, orange, red, blue, yellow and grey similar to the RAL indicated below.


Threaded female stainless steel AISI-303 insert, spring in stainless-steel.

Great knob for safety applications.

This knob only turns when pressed downward and turned simultaneously to avoid involuntary turning.

Other colors and sizes, ask.

	RAL 7021 Black
	RAL 2004 Orange
	RAL 3001 Red
	RAL 5005 Blue
	RAL 1021 Yellow
	RAL 7038 Grey

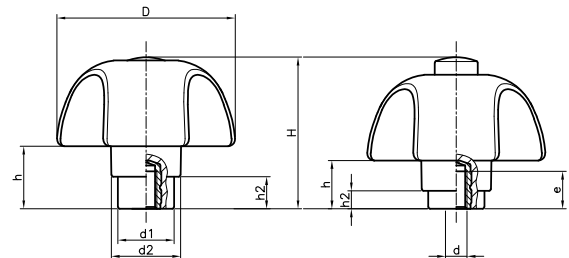

REST POSITION

D	h	h2
50	17,5	9

WORKING POSITION

D	h	h2
50	13,5	5



Black Cap	Orange Cap	Red Cap	Blue Cap	Yellow Cap	Grey Cap	D	H	d	e	d1	d2	Body
11006853004	11006853111	11006853113	11006853115	11006853117	11006853119	50	42	M6	10	16	19,5	Black
11006853005	11006853112	11006853114	11006853116	11006853118	11006853120	50	42	M8	14	16	19,5	Black
11006853123	11006853121	11006853125	11006853127	11006853129	11006853131	50	42	M6	10	16	19,5	Orange
11006853124	11006853122	11006853126	11006853128	11006853130	11006853132	50	42	M8	14	16	19,5	Orange
11006853135	11006853137	11006853133	11006853139	11006853141	11006853143	50	42	M6	10	16	19,5	Red
11006853136	11006853138	11006853134	11006853140	11006853142	11006853144	50	42	M8	14	16	19,5	Red
11006853147	11006853149	11006853151	11006853145	11006853153	11006853155	50	42	M6	10	16	19,5	Blue
11006853148	11006853150	11006853152	11006853146	11006853154	11006853156	50	42	M8	14	16	19,5	Blue
11006853159	11006853161	11006853163	11006853165	11006853157	11006853167	50	42	M6	10	16	19,5	Yellow
11006853160	11006853162	11006853164	11006853166	11006853158	11006853168	50	42	M8	14	16	19,5	Yellow
11006853171	11006853173	11006853175	11006853177	11006853179	11006853169	50	42	M6	10	16	19,5	Grey
11006853172	11006853174	11006853176	11006853178	11006853180	11006853170	50	42	M8	14	16	19,5	Grey