


420003 ADJUSTABLE FEET WITH ASYMETRICAL BASE AND THREADED STUD

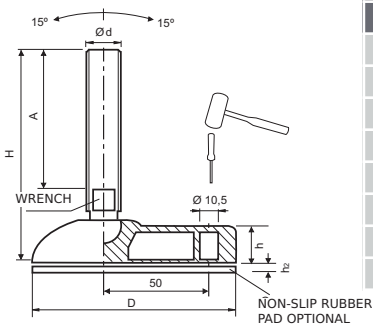

Code	D	d	A	H	Wrench	h	h2	Kg*
42000309530	95	M8	45	72	6	15	3	1200
42000309531	95	M8	65	92	6	15	3	1200
42000309532	95	M10	70	99	8	15	3	1300
42000309533	95	M12	43	74	10	15	3	1400
42000309534	95	M12	93	124	10	15	3	1400
42000309535	95	M16	90	125	13	15	3	1700
42000309536	95	M16	125	160	13	15	3	1700
42000309537	95	M16	165	200	13	15	3	1700

Locknut available.

PA black reinforced polyamide.
Treated steel stud.
*Max. static load (vertical stud).
Holes can be opened with the help of a hammer
for fixing the foot to the floor.
Other studs lenghts, please ask.
Optional: Black PVC non-slip rubber pad.
Supplied not mounted.
Code: 42005003090.