


470046 KNURLED KNOB WITH INSERT WITH SMOOTH HOLE AND FLANGE



Code	D	H	h	m	d	d3	d4	d5	h1	h3	Dm	d1 H10	Q
47004638400	38	37	7	11,5	30	18	4,5	M4	16	5,5	12	6	26
47004653400	53,5	45	9	11,5	43	23	5,5	M5	16	13,5	12	8	24
47004666400	67	53	11	12	54	31	5,5	M5	16	13,5	14	8	30
47004680400	80	60	13	12	65	36	5,5	M5	16	19	16	8	30
47004693400	93	67	13	12,5	78	50	6,5	M6	18	23,5	18	8	32

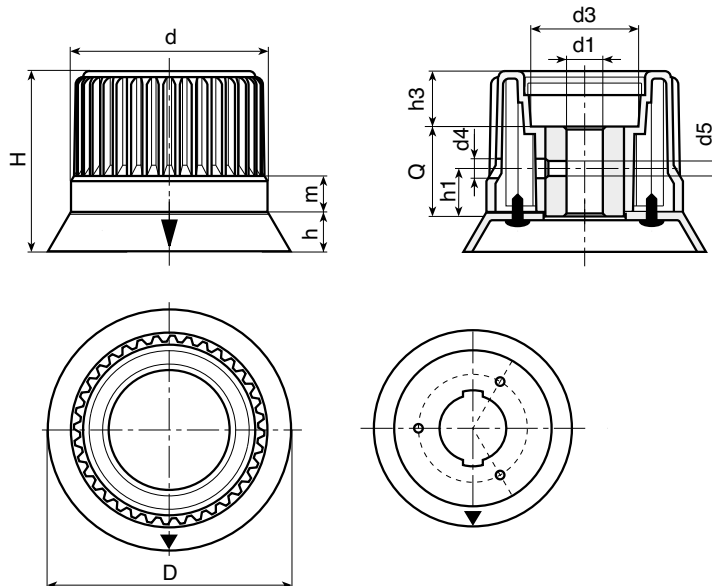

PA Black reinforced polyamide resistant to oils and greases.
Galvanised steel insert with smooth through bore (tolerance H10).
Central cap in polyamide color RAL 7035.
Black pad-printed arrow on grey flange RAL 7035.
3 galvanised self-tapping screws 2.9x9.5 UNI6954.
Working temperature between +135°C and -20°C.

Options:

Version with black flange and cap, and grey arrow.
Flange graduated scale with numbers from 0 to 9 with 100 graduations.