


47007330 ALUMINIUM-NICKEL-COBALT CYLINDRICAL MAGNET WITH GALVANISED STEEL SHELL



- (1) Turned free-cutting steel shell.
- (2) Aluminium-Nickel-Cobalt cylindrical magnet (AlNiCo).
- (3) Brass spacer.

The magnet can be made shorter or machined to value k without sustaining damage.
Working temperature between -20°C and +450°C.

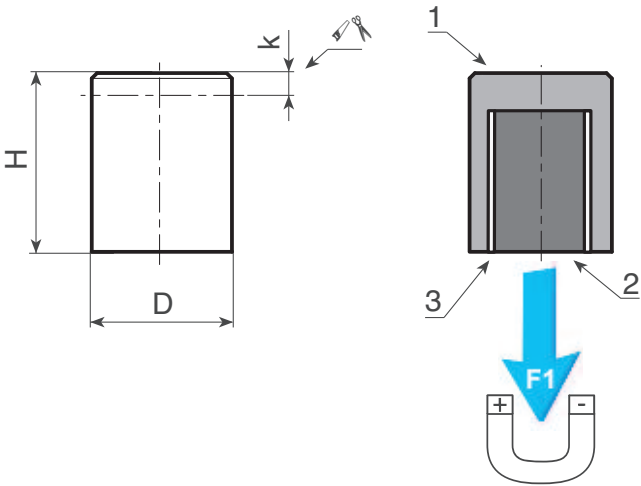

Code	D±0,1	H±0,2	k	P (g)	F1 (N)
47007330001	6	20	12	4,5	2
47007330002	8	20	11	7,5	4
47007330003	10	20	10	12	8,5
47007330004	13	20	8	19	12
47007330005	16	20	6	30	20
47007330006	20	25	5	58	40
47007330007	25	35	13	125	60
47007330008	32	40	9	220	160
47007330009	40	50	10	440	240
47007330010	50	60	10	813	400
47007330011	63	65	10	1306	660