


47007332 NEODYMIUM CYLINDRICAL MAGNET WITH GALVANISED STEEL SHELL



- (1) Turned free-cutting steel shell.
- (2) Neodymium cylindrical magnet (NdFeB).
- (3) Brass spacer.

The magnet can be made shorter or machined to value k without sustaining damage.

Working temperature between -20°C and +80°C.

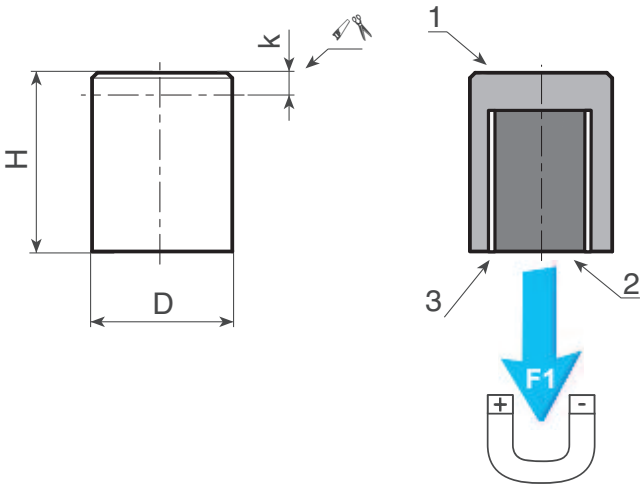

Code	D±0,1	H±0,2	k	P (g)	F1 (N)
47007332001	4	20	15	2	2,5
47007332002	5	20	15	3	4,5
47007332003	6	20	15	4,5	6
47007332004	8	20	15	8	12
47007332005	10	20	15	12	24
47007332006	13	20	15	21	60
47007332007	16	20	15	31	90
47007332008	20	25	18	61	135
47007332009	25	35	27	133	190
47007332010	32	40	32	249	340