


47007336

NEODYMIUM CYLINDRICAL MAGNET WITH GALVANISED STEEL SHELL WITH FEMALE THREADED HOLE



- (1) Turned free-cutting steel shell.
(2) Neodymium cylindrical magnet (NdFeB).
(3) Brass spacer.

Working temperature between -20°C and +80°C.

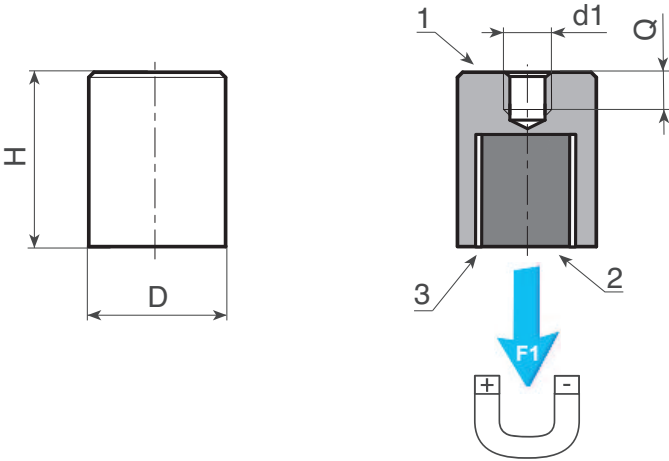

Code	D±0,1	H±0,2	d1	Q	P (g)	F1 (N)
47007336301	6	20	M03	6	4	6
47007336302	8	20	M03	5	7,5	12
47007336303	10	20	M04	7	11	24
47007336304	13	20	M04	7	20	60
47007336305	16	20	M04	7	30	90
47007336306	20	25	M06	9	58	135
47007336307	25	35	M06	9	131	190
47007336308	32	40	M08	12	243	340
47007336309	40	50	M08	12	480	700
47007336310	50	60	M10	12	900	1000
47007336311	63	65	M12	14	1560	1700