

480016 FILLER BREATHER CAPS WITH STRAINER BAYONET STYLE FSB



FSB/05

FSB/25




FSB/25/L




FSB/25 BM

Code	Model	Air flow	A	B	C	D
48001605000	FSB/05	120 Lt/min	46,5	44	65	27,5
48001625000	FSB/25 (L)	600 Lt/min	80	58,5	78,5	49
48001625200	FSB/25SD	600 Lt/min	80	55	105	38
48001625100	FSB/25BM	600 Lt/min	80	55	101	38

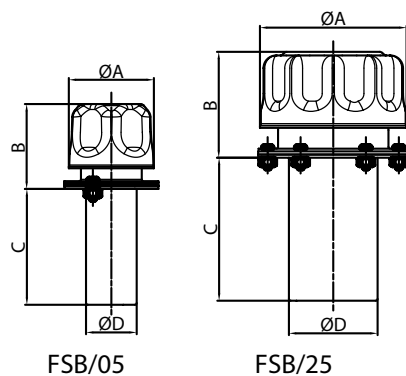


FSB/05


FSB/25






Brida con 3 orificios para FSB/05



Brida para soldar para FSB/25-SD



Brida con 6 orificios para FSB/25

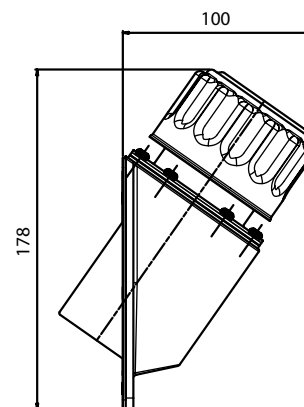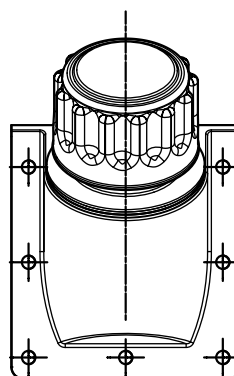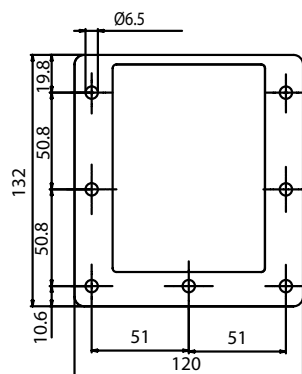

Chromed steel ventilated lid.

Polyurethane filter element 40 microns, (10 microns available on request).

Flange mounting with 3 or 6 M5 screws.

Cap with bayonet connection.

The FSB/25SD version is manufactured without holes and prepared to be welded to the tank surface.

Standard 800 micron filtration grade metal strainer, removable in the FSB/25/38 model.

The rugged cast aluminum housing (model FSB/BM) is intended for side mounting on the tank.

Flat packing ring made of cork impregnated with rubber or, on request, in NBR synthetic rubber.

Available on request model FSB/25/L with safety lock.

Air flow up to 950 Lt/min.