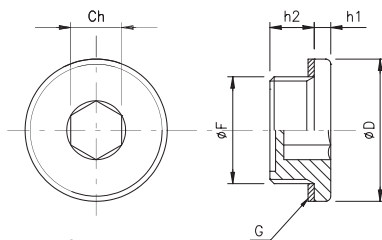


480031
CLOSING PLUG WITH INTERNAL HEX TCNB


G - Flat fiber gasket

Code	F	Ch	D	h1	h2	P (Nm)	P (50%FV) (Nm)
48003106000	G 1/4"	6	18	3	8	3÷5	5÷7
48003109000	G 3/8"	8	22,5	3,5	10,5	6÷8	8÷10
48003112000	G 1/2"	10	28	4	10	8÷10	10÷12
48003119000	G 3/4"	12	35	4	10,5	10÷12	18÷20
48003114000	M 14x1,5	6	20	2,5	9	3÷5	5÷7
48003116000	M 16x1,5	8	22,5	3,5	10,5	6÷8	8÷10
48003118000	M 18x1,5	10	26	3	10	7÷9	10÷12
48003120000	M 20x1,5	10	28	3,5	10,5	7÷9	10÷12
48003122000	M 22x1,5	10	28	3,5	10,5	7÷9	10÷12
48003126000	M 26x1,5	12	35	3	11,5	10÷12	18÷20

Threaded cap with internal hexagon to occupy the minimum external space.

Made with reinforced thermoplastic resin PA66 with 30% fiberglass that guarantees its optimal mechanical resistance at high and low temperatures.

Asbestos-free fiber flat retaining washer (on request it can be supplied with an anti-oil rubber O-ring).
max temperature of use 100°C.

P - Max. tightening torque for mounting.

Upon request, they can be manufactured in polyamide reinforced with 50% fiberglass to increase mechanical resistance and max. working temperature. up to 120°C continuously and peaks of 150°C.