


480035 KNURLED OIL FILL PLUG TCZ/TCZS

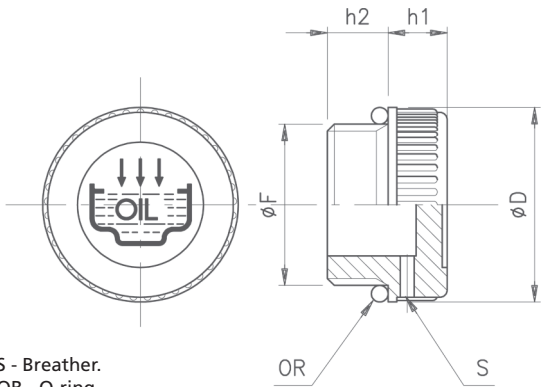

Code without breather	Code with breather	F	D	h2	h1
48003506101	48003506201	G 1/4"	20	9	9
48003509101	48003509201	G 3/8"	20,5	10	9
48003512101	48003512201	G 1/2"	28	10,5	10,5
48003519101	48003519201	G 3/4"	31	11	12
48003525101	48003525201	G 1"	39	12	12
48003531101	48003531201	G 1 1/4"	49	13,5	13
48003538101	48003538201	G 1 1/2"	55	14,5	14,7
48003550011	48003550201	G 2"	68,5	16	15
48003514101	48003514201	M 14x1,5	20	9	9
48003516101	48003516201	M 16x1,5	20	10	9
48003518101	48003518201	M 18x1,5	28	10	10,5
48003520101	48003520201	M 20x1,5	28	10	10,5
48003522101	48003522201	M 22x1,5	28	10	10,5

Threaded plugs with knurled head made of thermoplastic (Polyamide 66) that guarantees high mechanical resistance at low and high temperatures (working temperature from -30°C to +100°C), dimensional stability and shock resistance.
O-ring NBR 70 Shore.
Standard colour: Black.

The TCZ has the graphic symbol and the word OIL at the top; The TCZS model has a vent hole located on the side of the hexagon with a diameter of 2 to 3.5 mm, depending on the size of the plug.