


480055

FILLER BREATHERS WITH ONE-WAY VALVE TMDV-TMDAV



Code without dipstick	Code with dipstick	F	D	d	h1	h2
48005509101	48005509201	G 3/8"	36	23	21	11
48005512101	48005512201	G 1/2"	41	28	21	12
48005519101	48005519201	G 3/4"	47	33	22	12
48005525101	48005525201	G 1"	52	38	25	12
48005531101	48005531201	G 1 1/4"	63	49	29	13
48005514101	48005514201	M14x1,5	41	28	21,5	12
48005516101	48005516201	M16x1,5	36	23	21	11
48005518101	48005518201	M18x1,5	41	28	21	12
48005520101	48005520201	M20x1,5	41	28	21	12
48005522101	48005522201	M22x1,5	41	28	21	12

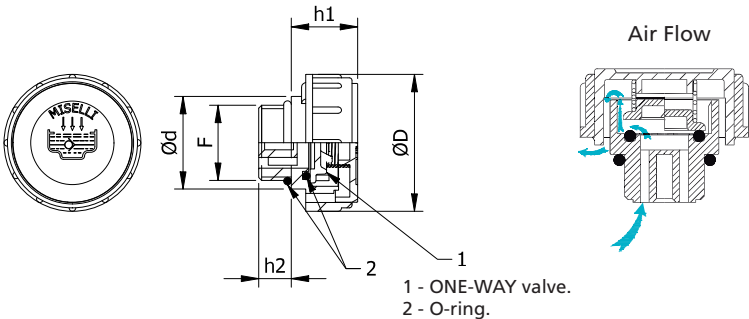

Breather cap with vertical ribs for a better grip. Made of black polyamide 66 that ensures high mechanical resistance at high and low temperatures. Working temperature from -30°C to +100°C. Resistant to oils and fats. Red cap with graphic valve symbol. Including 70 Shore O-rings.

These plugs are recommended to maintain a certain air pressure in the tank. The ONE-WAY valve only allows air to escape from the tank when there is an overpressure that exceeds 0.30 bar(±0.1)/ 4.3 PSI(±1.5). On request, the valve can be supplied calibrated at 0.10 bar(±0.03)/1.5 PSI(±0.45).

The rod of the corresponding model is made of blued steel, cylindrical section and standard length of 200mm. For minimum orders of 250u, the length can be customized and include MIN-MAX markings.