TECNODIN

DATA SHEET
PRODUCT

480072 HEX PLUG TCA/TCAS WITH DIPSTICK



Code whitout breather	Code with breather	F	CH	D	h1	h2	d1
48007206120	48007206220	G 1/4"	17	19	7	9	4
48007209150	48007209220	G 3/8"	18	22	7,5	10	4
48007212120	48007212220	G 1/2"	24	28	7,5	11	4
48007219120	48007219220	G 3/4"	30	34	9	11	5
48007225120	48007225220	G 1"	36	42	10,5	12	5
48007231120	48007235220	G 1 1/4"	42	51	12	13,5	5
48007250120	48007250220	G 2"	64	74	13,5	16	5
48007214120	48007214220	M 14x1.5	17	19	7	9	4
48007216120	48007216220	M 16x1.5	18	21	7,5	10	4
48007218120	48007218220	M 18x1.5	21	26	7,5	10	4
48007220120	48007220220	M 20x1.5	24	28	8	10	4
48007222120	48007222220	M 22x1.5	24	28	8	11	4


Filler cap with hexagonal head made of thermoplastic (polyamide 66) and with metal rod. High mechanical strength at low and high temperatures, dimensional stability and impact resistance.

Working temperatures from -30°C to +100°C.
Fiber joint.

Incorporates the graphic filling symbol and the word OIL on the surface of the cap.

The model with breather incorporates a hole on the side with a diameter of 2 to 3.5mm depending on the size of the cap.

The metal rod is blued, has a cylindrical section and a standard length of 200mm.
For minimum quantities of 250u, it can be supplied with the customized length and with MIN-MAX notches in the desired position.

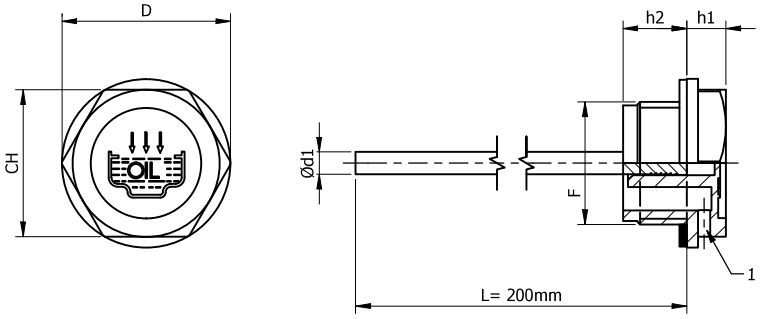

1 - Breather.