

480073 KNURLED PLUG TCAZ/TCASZ WITH DIPSTICK




Code without breather	Code with breather	F	D	h1	h2	d1
48007306101	48007306201	G 1/4"	20	9	9	4
48007309100	48007309201	G 3/8"	20,5	9	10	4
48007312101	48007312200	G 1/2"	28	10,5	10,5	4
48007319101	48007319201	G 3/4"	31	12	11	5
48007325101	48007325220	G 1"	39	12	12	5
48007331101	48007331220	G 1 1/4"	49	13	13,5	5
48007350101	48007350201	G 2"	68,5	15	16	5
48007314101	48007314201	M 14x1.5	20	9	9	4
48007316101	48007316201	M 16x1.5	20	9	10	4
48007318101	48007318201	M 18x1.5	28	10,5	10	4
48007320101	48007320201	M 20x1.5	28	10,5	10	4
48007322101	48007322201	M 22x1.5	28	10,5	11	4

Knurled filler cap with rod made of thermoplastic (Polyamide 66) that ensures high mechanical resistance both at high and low temperatures, dimensional stability and resistance to impacts. Working temperature from -30°C to +100°C.

O-ring NBR 70 Shore.

They have the graphic filling symbol and the word OIL on the surface of the cap.

The vent is located on the side and has a diameter of 2 to 3.5mm depending on the size of the cap. The cylindrical section steel rod is blackened and has a standard length of 200mm. For a minimum of 250u, the rod can be supplied with a custom length and MIN-MAX markings in the desired position.

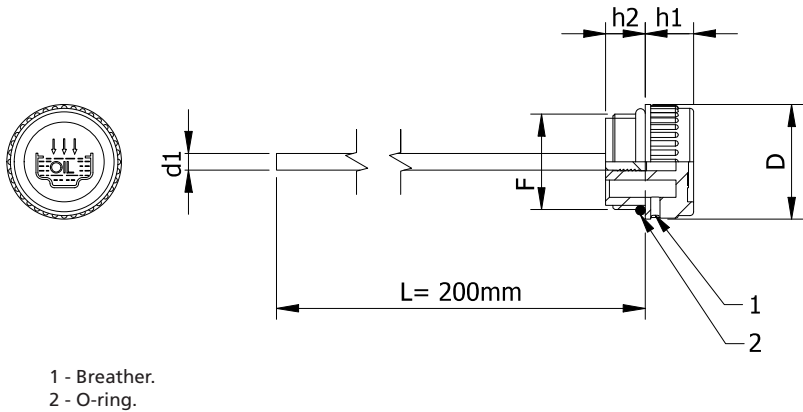

1 - Breather.
2 - O-ring.