





480077


FILLER BREATHER WITH STRAINER AND BAYONET
TMDF/FC/70-TMDV/FC/DS70




Code	Version
48007770000	70
48007770001	DS70



V1 - Safety valve.
V2 - Suction valve.
1 - Air filter.

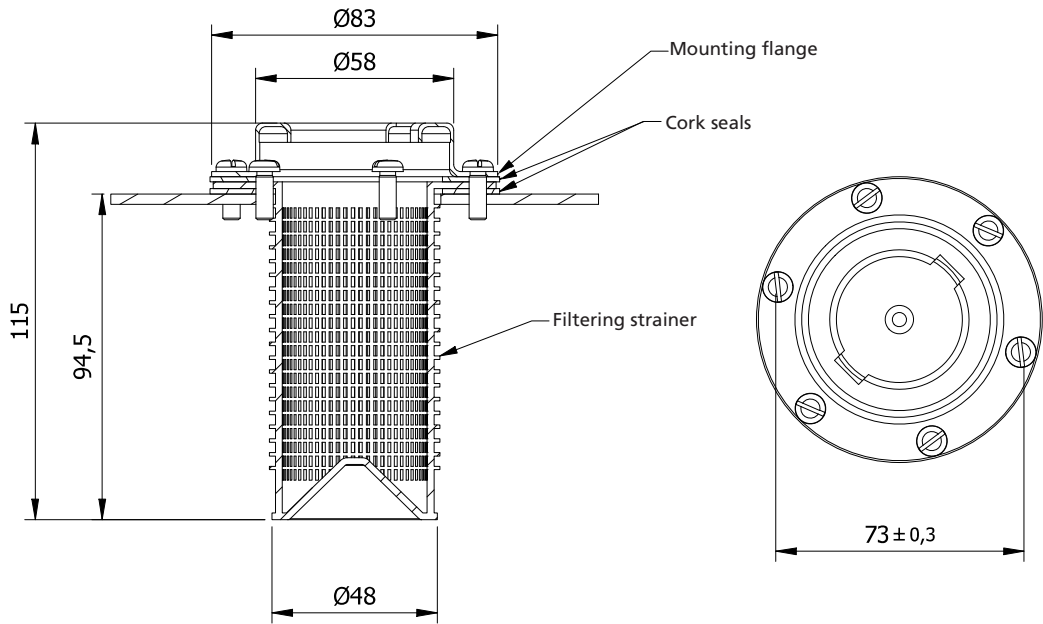

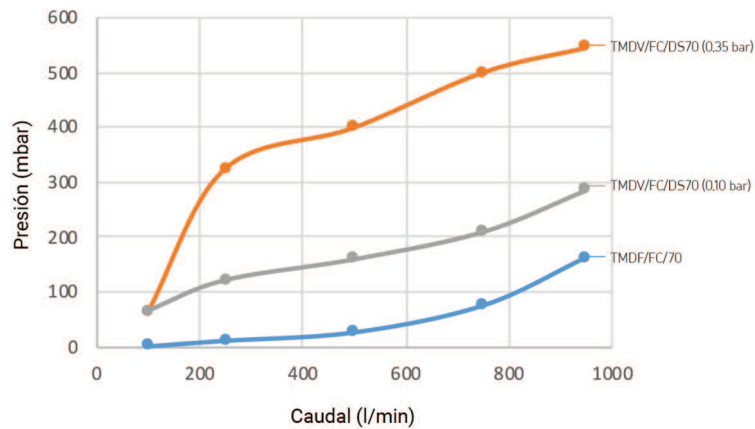

Circular head plug with vertical ribs for a better grip. Includes bayonet lock, safety chain, fastening flange with black polypropylene (PP) filter basket and polyurethane air filter located under the lid; Easy removal and placement for cleaning. This filter protects the tank from the entry of dirt and the valves from splashes.

The cap is made of black polyamide 66 that ensures high mechanical resistance at low and high temperatures (max. working temperature +100°C).

The TMDF/FC/70 model incorporates a red cap with the graphic symbol "FILL OIL".

The TMDV/FC/DS70 model incorporates a black cover with the graphic symbol of double valve. This model has a double valve safety system. The safety valve is set around 0.35bar/5 PSI, the suction valve around 0.05bar/0.72 PSI. This model is used in hydraulic applications where the air flow needs to be controlled in both directions, externally when an internal overpressure is generated, internally when a drop in fluid level creates a vacuum.

Air flow up to 750 l/min (See graph).

Flat cork gasket and six zinc plated mounting screws are included.