

480082-480084


OIL LEVEL DIPSTICK PRESS-FIT



Available version with flexible flat dipstick.

Code without breather	Code with breather	Ø F	D	d	d1	d2	h1	h2	L
48008214000	48008214120	14	27	13	4	17,9	34	13	180 ±5
48008218000	48008218120	18	32	14	5	23,6	45	17	180 ±5
48008220000	48008220120	20	32	14	5	23,6	44,5	18	180 ±5
48008230000	48008230120	30	32	14	5	33,6	45	17	190 ±5
48008412000	-	12	27	14	4	18	36	20	180 ±5
48008414020	48008414120	14	27	13	4	18	34	20	195 ±5
48008418000	48008418118	18	32	14	5	23,5	44	21	195 ±5
48008420000	48008420100	20	32	16	5	23,6	44	21	180 ±5

Version 480082 - 1 O-ring.

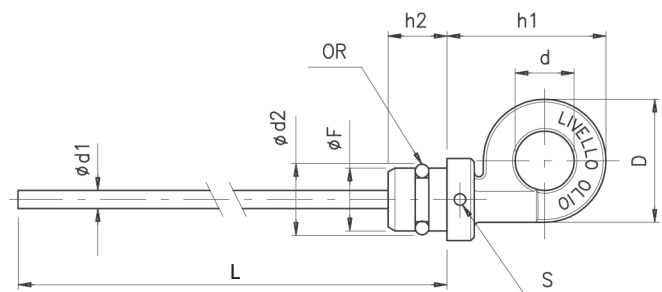

S - Breather hole.
OR - O-ring.

Press-fit plug with zinc phosphate surface and cylindrical section dipstick. Made of black polyamide PA66 that gives it high mechanical resistance, dimensional stability and shocks resistance.

Maximum working temperature 100° C.

NBR 70 shore synthetic rubber retaining O-ring. Versions available with one O-ring or two O-rings. The versions with a breather hole have a 2.5 mm hole located in the flange under the handle.

Upon request and for minimum quantities, a customized dipstick can be supplied with the desired length and/or with MAX./MIN notches.

Available in other colors, consult minimum quantities.

Version 480084 - 2 O-rings.

