


## 410022 MF ANTI-VIBRATION MOUNT

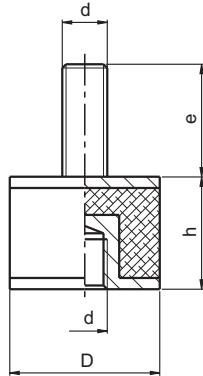

NR Rubber compound  $60^{\circ} \pm 5^{\circ}$  shore A.  
Zinc plated steel stud.  
More sizes on demand.  
Cp: Max. compression load (Kg).  
Cz: Max. shear load (Kg).  
Available in stainless steel.  
Ask for MQ.

| Code        | D   | h  | d   | e  | Cp  | Cz |
|-------------|-----|----|-----|----|-----|----|
| 41002201515 | 15  | 15 | M4  | 14 | 15  | 3  |
| 41002202015 | 20  | 15 | M6  | 16 | 34  | 3  |
| 41002202020 | 20  | 20 | M6  | 16 | 29  | 2  |
| 41002202520 | 25  | 20 | M6  | 18 | 45  | 5  |
| 41002202530 | 25  | 30 | M6  | 18 | 35  | 3  |
| 41002203020 | 30  | 20 | M8  | 23 | 66  | 9  |
| 41002203030 | 30  | 30 | M8  | 23 | 61  | 7  |
| 41002203040 | 30  | 40 | M8  | 23 | 54  | 5  |
| 41002204030 | 40  | 30 | M8  | 23 | 98  | 15 |
| 41002204035 | 40  | 35 | M8  | 23 | 88  | 13 |
| 41002205020 | 50  | 20 | M10 | 28 | 169 | 21 |
| 41002205030 | 50  | 30 | M10 | 28 | 159 | 20 |
| 41002205040 | 50  | 40 | M10 | 28 | 144 | 18 |
| 41002205050 | 50  | 50 | M10 | 28 | 134 | 14 |
| 41002206550 | 65  | 50 | M12 | 37 | 230 | 23 |
| 41002207525 | 75  | 25 | M12 | 37 | 382 | 89 |
| 41002207540 | 75  | 40 | M12 | 37 | 378 | 78 |
| 41002207550 | 75  | 50 | M12 | 37 | 373 | 68 |
| 41002210050 | 100 | 50 | M16 | 45 | 660 | 98 |
| 41002210055 | 100 | 55 | M16 | 45 | 636 | 78 |
| 41002210060 | 100 | 60 | M16 | 45 | 586 | 48 |